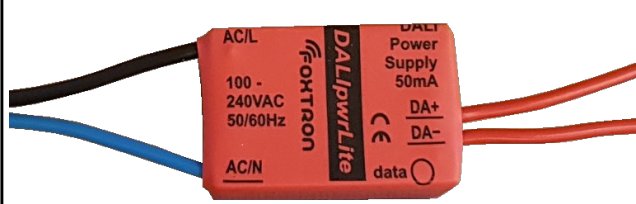


User manual

version 1.0


DALIpwrLite

	Power supply for DALI bus
	Ongoing communication signaling
	Signaling voltage presence on the bus
	Maximum load 50mA
	Small dimensions
	Short circuit protection

Technical specification		
Power supply	100 ÷ 240	V
Output current	50	mA
Output voltage	13,7	V
Wires cross section	1,5	mm ²
Ingress protection	IP40	
Ambient working temperature	0 ÷ 50	°C
Storage temperature	-10 ÷ 70	°C
Weight	30	g
Galvanic separation	4000	V

Signaling	
data	Power/Data permanent light – voltage presence on the bus blinking – ongoing communication on DALI bus

Wires connection

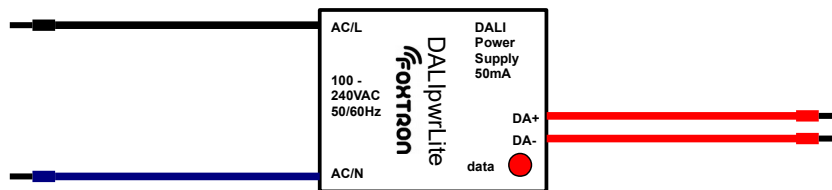

DA+, DA- DALI bus connection
AC/L - live
AC/N - neutral

Dimensions (in mm)

