


Fluorescent ballast control unit, type PEF 150

www.foxtron.eu

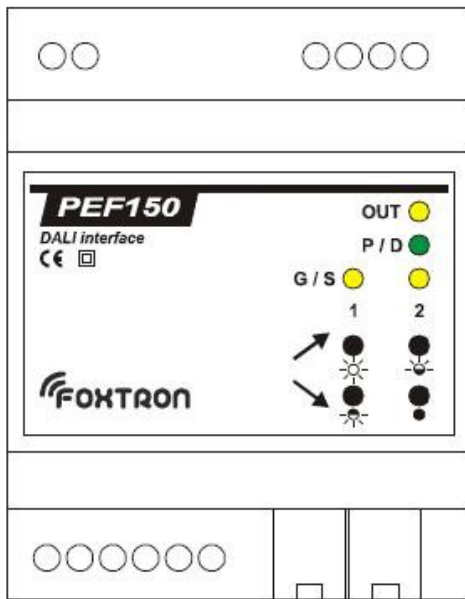

- two independent outputs for control of dimming ballasts for DALI lamps
- control by *PEXbus* and external press buttons
- test buttons on front panel
- programmable parameters (inputs response, min. and max. value of output voltage, scan speed)
- indication of power and output level
- easy installation
- small dimensions

Technical specification

| | |
|-------------------------------------|---|
| Power requirements: | 230V / 50/60Hz, 50 mA |
| Number of regulated outputs: | 15 |
| Max. load: | 64 electronic ballasts for each output |
| Output current for DALI bus: | 160 mA |
| Control terminals: | For conductors up to $S = 1.5 \text{ mm}^2$ |
| Power supply terminals: | For conductors up to $S = 1.5 \text{ mm}^2$ |
| Output terminals: | For conductors up to $S = 1.5 \text{ mm}^2$ |
| Input/Output <i>PEXbus</i>: | 2 x connector RJ-11-4 |
| Operating ambient temp.: | 0 to 50°C |
| Storage temperature: | - 20 to 60°C |
| Weight: | 0.25 kg |
| Dimensions w x h x d: | (71 x 90 x 58) mm (4 modules 17.5 mm each) |

Terminals connection

