


User manual

document version 0.1 for firmware 1.0

DALItouch

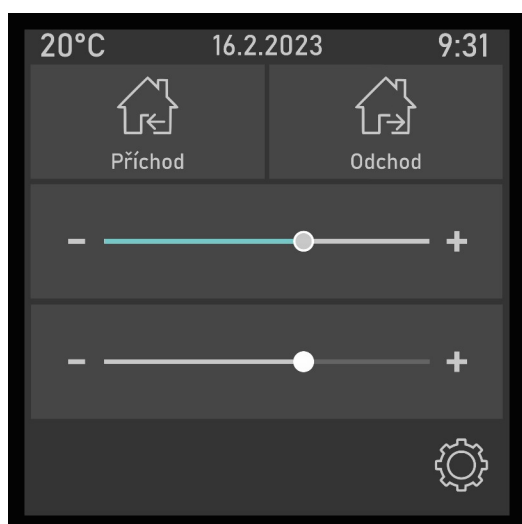

DALI universal touch controller

230V power supply

4" touch display

installation on KU68

optional user functions

DALItouch is a universal touchscreen display on the DALI bus on which optional user functions can be displayed.

Technical Specifications		
bus	DALI / DALI2	
number of controllable buses	1	
power supply	230	V
consumption	1	W
display resolution	480P x 480P	
cross section of wires	1,5	mm ²
fixing	na KU68	
multimaster	yes	
degree of coverage	IP20	
ambient working temperature	0 ÷ 50	°C
storage temperature	-10 ÷ 70	°C
weight	180	g


Buttons

DALItouch offers several options for bus, group or address control:

Dimmer – the possibility of continuous control of a given circuit by the rider

Push – behaving like a standard single push button, which includes only 1 function

Toggle – acting as a toggle button between I/O

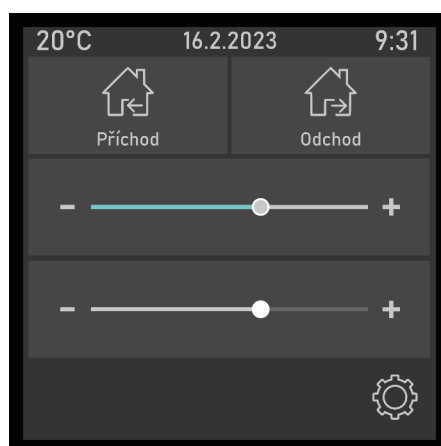


Clamps wiring

On the back of the device you will find the DA | DA terminals, where you can connect the DALI double line regardless of polarity.

You will also find the N | L terminals - zero and phase.

Dimensions [mm]

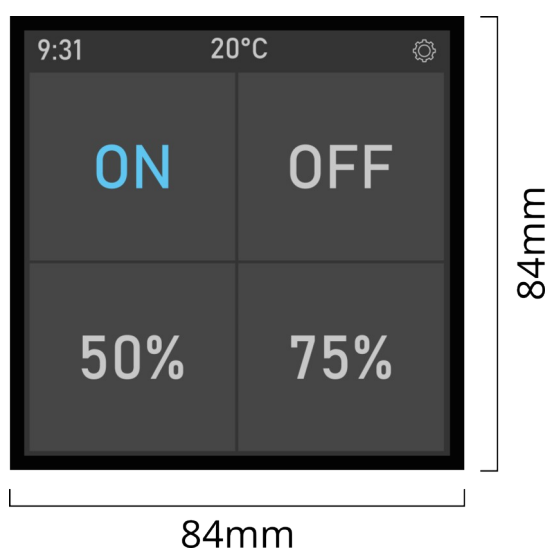

tel: +420 226 522 222
e-mail: info@foxtron.cz
web: www.foxtron.eu