


DALI4sw – konfigurace sekvence

Zadání

Po stisku tlačítka rozsviďte světlo s adresou 1. Po nastavené době je zhasněte a rozsviďte světlo s adresou 2; po dalším intervalu zhasněte světlo s adresou 2 a rozsviďte světlo s adresou 3 atd.

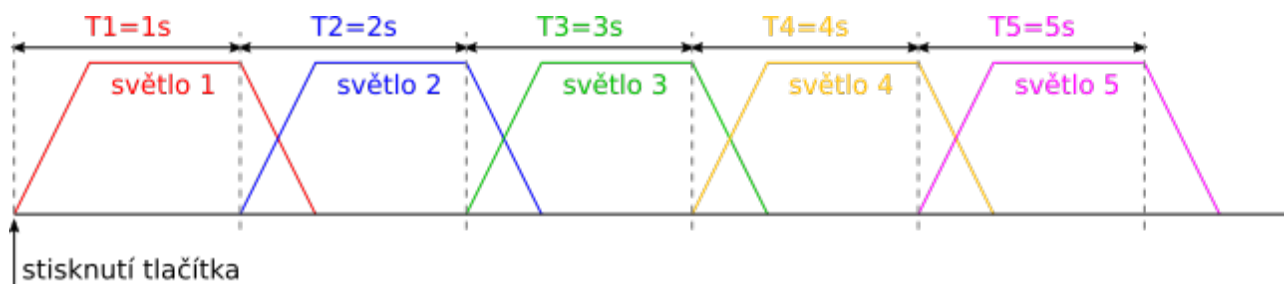

Způsob vytvoření

	událost	akce světel	nastavení sekvence	nastavení časovače
1	sepnutí tlačítka	1 = ON (2–5 = OFF)	sekvence = 1	T = 1 s
2	vypršení časovače	1 = OFF, 2 = ON	sekvence = 2	T = 2 s
3	vypršení časovače	2 = OFF, 3 = ON	sekvence = 3	T = 3 s
4	vypršení časovače	3 = OFF, 4 = ON	sekvence = 4	T = 4 s
5	vypršení časovače	4 = OFF, 5 = ON	sekvence = 5	T = 5 s
6	vypršení časovače	5 = OFF		

Po stisku tlačítka se nejprve odešle vypnutí všech světel pro případ, že byla světla ručně zapnuta nebo ještě probíhala naposledy spuštěná sekvence.

Úrovně rozsvícení světel jsou v příkladu nastaveny na 50 % a „**Fade time**“ na 1 s; jednotlivé hodnoty mohou být samozřejmě jiné.

Events:		
1 - After start	N.	Command
✓ 2 - Button pressed	1	Off
3 - Button released	2	DirectArcPower(229), FdT2 (1.0s)
4 - Short press	3	SetNextSequence 1
5 - Long press start	4	SetTimer 1.0s
6 - Long press repeat		
7 - Long press stop		
8 - Double press		
9 - Button stuck start		
10 - Button stuck stop		
✓ 11 - Timer reached		
12 - Counter comparing		

Events:	
1 - After start	
✓ 2 - Button pressed	
3 - Button released	
4 - Short press	
5 - Long press start	
6 - Long press repeat	
7 - Long press stop	
8 - Double press	
9 - Button stuck start	
10 - Button stuck stop	
✓ 11 - Timer reached	
12 - Counter comparing	

N.	Command	Addr
Sequence 1:		
1	DirectArcPower(0), FdT2 (1.0s)	A1
2	DirectArcPower(229), FdT2 (1.0s)	A2
3	SetNextSequence 2	
4	SetTimer 2.0s	
Sequence 2:		
1	DirectArcPower(0), FdT2 (1.0s)	A2
2	DirectArcPower(229), FdT2 (1.0s)	A3
3	SetNextSequence 3	
4	SetTimer 3.0s	
Sequence 3:		
1	DirectArcPower(0), FdT2 (1.0s)	A3

www.foxtron.cz

N.	Command	Addr
	Sequence 1:	
1	DirectArcPower(0), FdT2 (1.0s)	A1
2	DirectArcPower(229), FdT2 (1.0s)	A2
3	SetNextSequence 2	
4	SetTimer 2.0s	
	Sequence 2:	
1	DirectArcPower(0), FdT2 (1.0s)	A2
2	DirectArcPower(229), FdT2 (1.0s)	A3
3	SetNextSequence 3	
4	SetTimer 3.0s	
	Sequence 3:	
1	DirectArcPower(0), FdT2 (1.0s)	A3
2	DirectArcPower(229), FdT2 (1.0s)	A4
3	SetNextSequence 4	
4	SetTimer 4.0s	
	Sequence 4:	
1	DirectArcPower(0), FdT2 (1.0s)	A4
2	DirectArcPower(229), FdT2 (1.0s)	A5
3	SetNextSequence 5	
4	SetTimer 5.0s	
	Sequence 5:	
1	DirectArcPower(0), FdT2 (1.0s)	A5