


## Programmable control unit, type PEE120

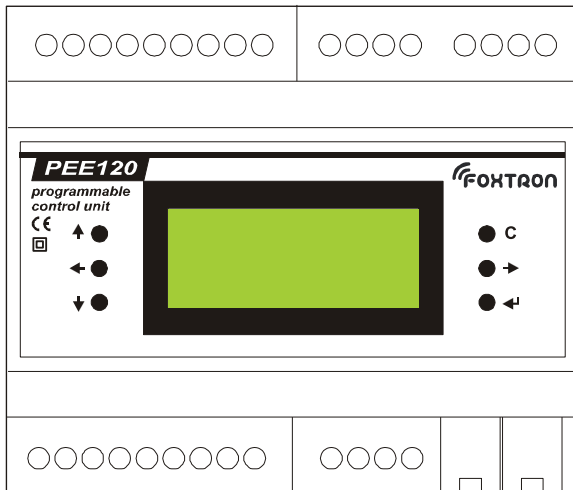


- Programmable controller for Power Express units
- 12 scenes, 40 cues each
- initiation of scenes by real time, external buttons or after power up
- chase time for each scene
- 12 programmable outputs for LED indication of selected scene
- edit buttons and four line display on front panel
- easy installation
- small dimensions

### Technical Specification

<b>Power requirements:</b>	230V / 50/60Hz, 0.1Amps
<b>Number of scenes:</b>	12
<b>Max. load of LED outputs:</b>	100 mA per output, 150 mA total
<b>EMI radiation:</b>	According to EN55014 and EN55011 standard
<b>Insulation strength:</b>	2.5 kV between power and control circuits
<b>Control terminals:</b>	For conductors up to $S = 1.5 \text{ mm}^2$
<b>Power supply terminals:</b>	For conductors up to $S = 1.5 \text{ mm}^2$
<b>Output terminals:</b>	For conductors up to $S = 1.5 \text{ mm}^2$
<b>Input/Output PEXbus:</b>	Connector RJ 4p4c
<b>Operating ambient temp.:</b>	0 až 50°C
<b>Storage temperature:</b>	- 20 až 90°C
<b>Weight:</b>	0.5 kg
<b>Dimensions w x h x d:</b>	(106 x 90 x 58) mm (6 modules 17.5 mm each)

### Terminals connection

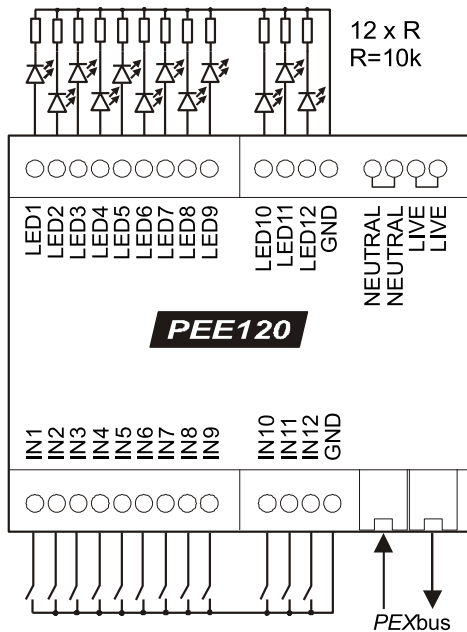

### Typ RJ 4p4c

