


## Fluorescent ballast control unit, type PEF 150DMX

www.foxtron.eu

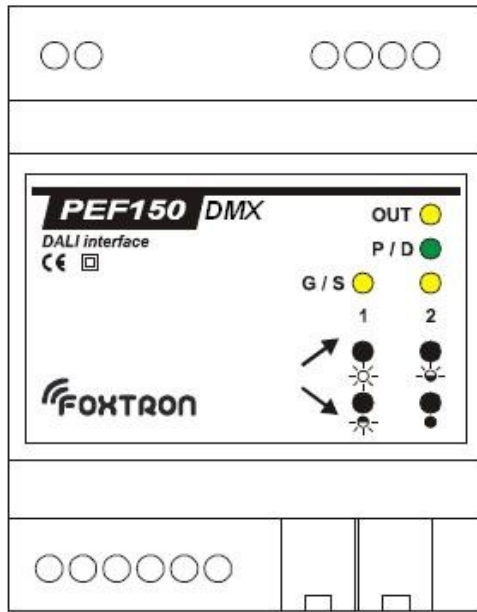

- Up to 64 dimmable fluorescent ballasts on one bus can be divided into 16 independent groups
- compatible with DALI ballasts from other companies
- control of all groups via bus DMX512
- setting addresses 1-512
- number of controlled groups 1-16
- two groups can be controlled with external buttons (without DMX signal)
- setting/test buttons on the front panel
- indication of output level and short circuit of the DALI bus
- easy assembly
- small dimensions

### Technical specification

<b>Power requirements:</b>	230V / 50/60Hz, 50 mA
<b>Number of regulated outputs:</b>	15
<b>Max. load:</b>	64 electronic ballasts for each output
<b>Output current for DALI bus:</b>	160 mA
<b>Control terminals:</b>	For conductors up to $S = 1.5 \text{ mm}^2$
<b>Power supply terminals:</b>	For conductors up to $S = 1.5 \text{ mm}^2$
<b>Output terminals:</b>	For conductors up to $S = 1.5 \text{ mm}^2$
<b>Input/Output PEXbus:</b>	2 x connector RJ-11-4
<b>Operating ambient temp.:</b>	0 to 50°C
<b>Storage temperature:</b>	- 20 to 60°C
<b>Weight:</b>	0.25 kg
<b>Dimensions w x h x d:</b>	(71 x 90 x 58) mm (4 modules 17.5 mm each)

### Terminals connection

